

# DLS Color Viewing Light v8 | S


LED-based viewing booth, standard light luminaires D50, D65, UV-A and 2 alternatives




- LED-based viewing booth
- Article-No.: 203278/ 203279\*

## LED CONTROL

- Easy and intuitive operation
- External control optionally available (Art.-No. 203029)
- ALT1 and ALT2 is pre-programmed according to the request
- Mixed light function - several types of light can be selected simultaneously

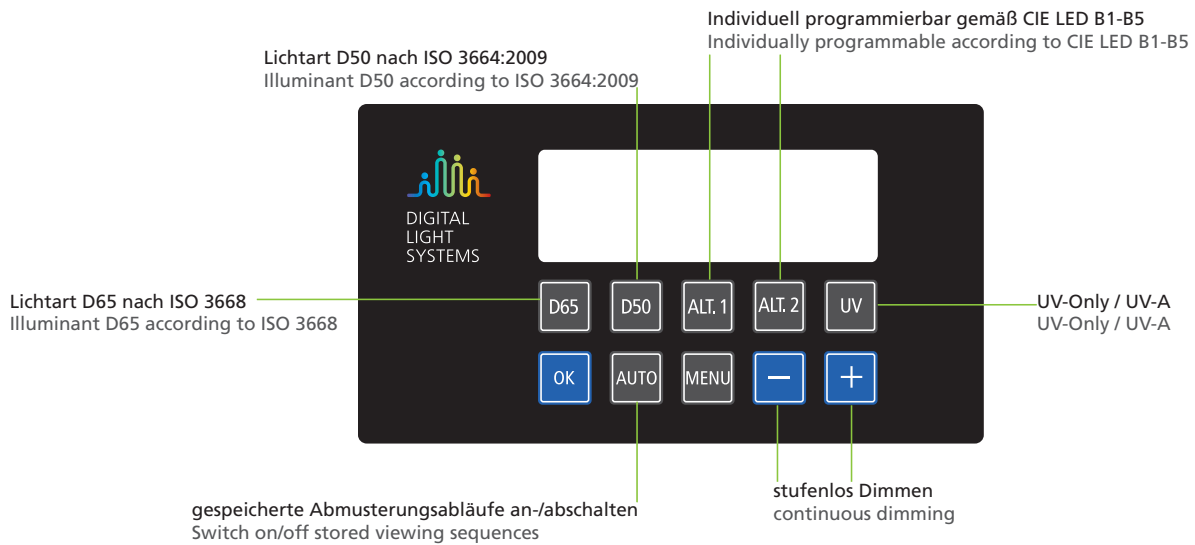

## DIMENSIONS

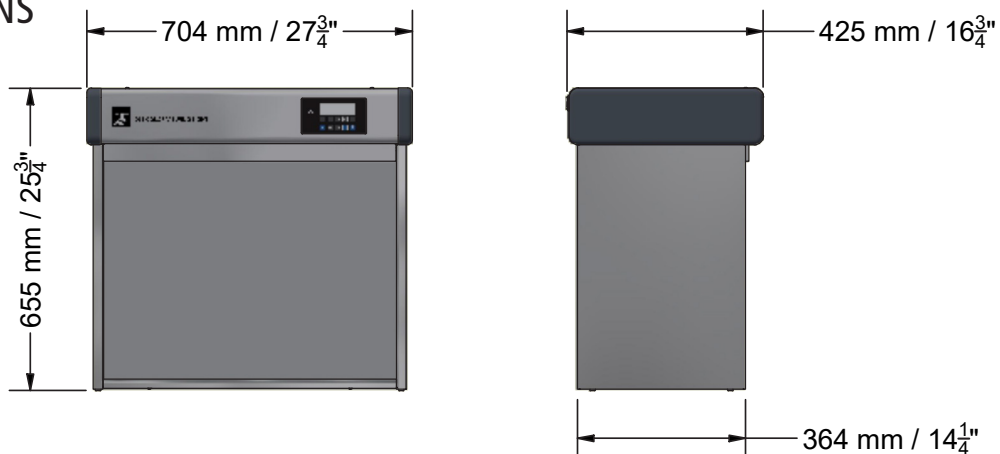

\* Data for US version of the product

## TECNICAL DATA

Electric data	
Maximum electric power	45 W
Electrical operating power	40 W
Operating voltage	230 V / 110V*
Tension frequency	50 / 60 Hz
Connection cable	power cable, angle plug type 303 to IEC socket type 601 / NEMA 5-15P Male*
Maximum continuous current (continuous operation)	0,2 A / 0,4 A*
Operating mode	S1: Continuous operation
Expected lifetime (continuous operation)	>50.000 h

Photometric data and colormetric characteristics	
Illuminant types	CIE D50 (5000 K) , CIE D65 (6500 K), UV-ONLY (UV-A), CIE B1-B5 (2733 - 6598 K / Ra=80)
Ra (Color Rendering Index) $\varnothing$	>95
Metamerism Index (visible range)	$\leq 0,8$
Metamerism Index (UV-range)	$\leq 0,6$
Chromaticity error	<0,002
Chromaticity coordinate (10°)	D50: x = 0,3478 y = 0,3595 ( $\leq 0,002$ ) D65: x = 0,3138 y = 0,3309 ( $\leq 0,002$ )
Dominant wavelength UV-ONLY	365 nm
Radiant power UV-ONLY	6 W
Risk assessment according to DIN-EN-62471	D65+UV / D50+UV: RG0 UV-ONLY: RG1


Mechanical data	
Illumination area (WxD)	64 x 36 cm / 25 1/4" x 14 1/8"*
Outside dimensions (WxHxD)	70 x 71 x 43 cm / 27 1/2" x 28" x 16 7/8"*
Product weight	12 kg
Housing	Aluminium
Lens	special prismatic lens, UV-transmissive
Protection class	IP 52
Permitted ambient temperature	0°C - 40°C / 32°F - 104°F

Environmental aspect (compared to conventional fluorescent lamps)	
CO <sub>2</sub> -savings	over 17 tons


\* Data for US version of the product

# SPECTRES


## Spectrum DLS Color Viewing Light D50

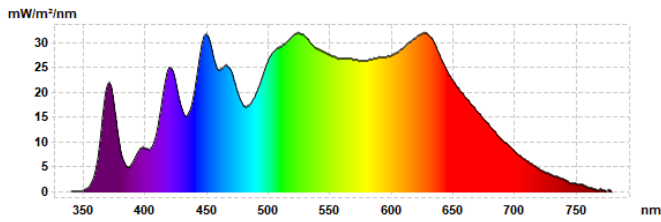


## Spectrum DLS Color Viewing Light D65

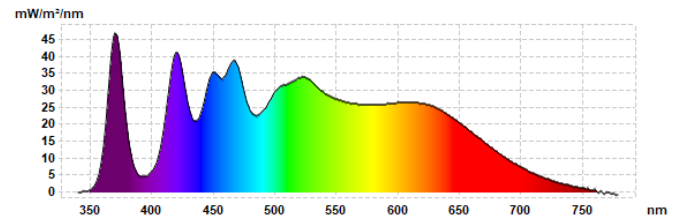


## Spectrum UV-A (UV-Only)

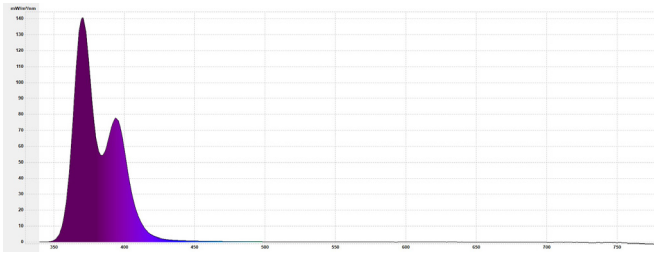


## Spectrum DLS Color Viewing Light CIE B1

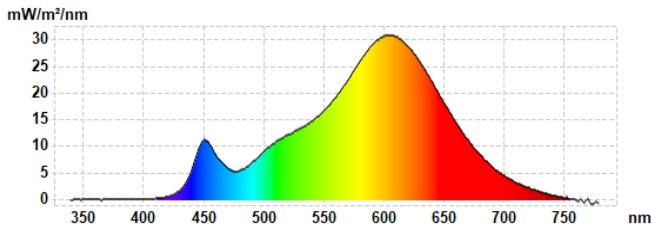

## Spectrum DLS Color Viewing Light CIE B2

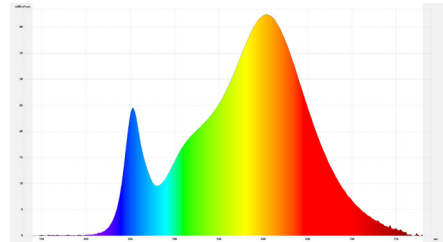

## Spectrum DLS Color Viewing Light CIE B3

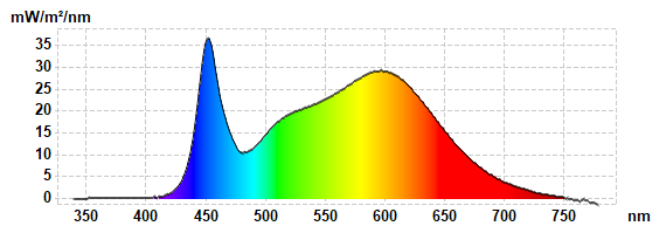

\* Data for US version of the product

